

SERVICE BULLETIN

M-957

November 17, 1987



LATE 1988 1340cc RUBBER MOUNT VEHICLES PIVOT BOLT RETAINER

This Bulletin is to advise you of a retaining clip that was added as a running change to 1988 rubber mount motorcycles.

See Figure 1. The clip can be installed and removed from the outside of either end cap by removing the access plug. Compress the looped ends of the clip with a needle nose pliers and insert or remove the clip through the access plug hole. The clip is seated against the outside shoulder of the large diameter bore in the end cap.

Position the clip so that the flat center portion of the clip is at the bottom of the bore where the offset is the greatest.

The clip can be ordered through regular parts channels by specifying H.D. Part No. 47819-87. The clip can be used on earlier models where the late style pivot shaft (introduced in mid. 1986) is used.

NOTE

Refer to appropriate Service Manual for pivot bolt torque

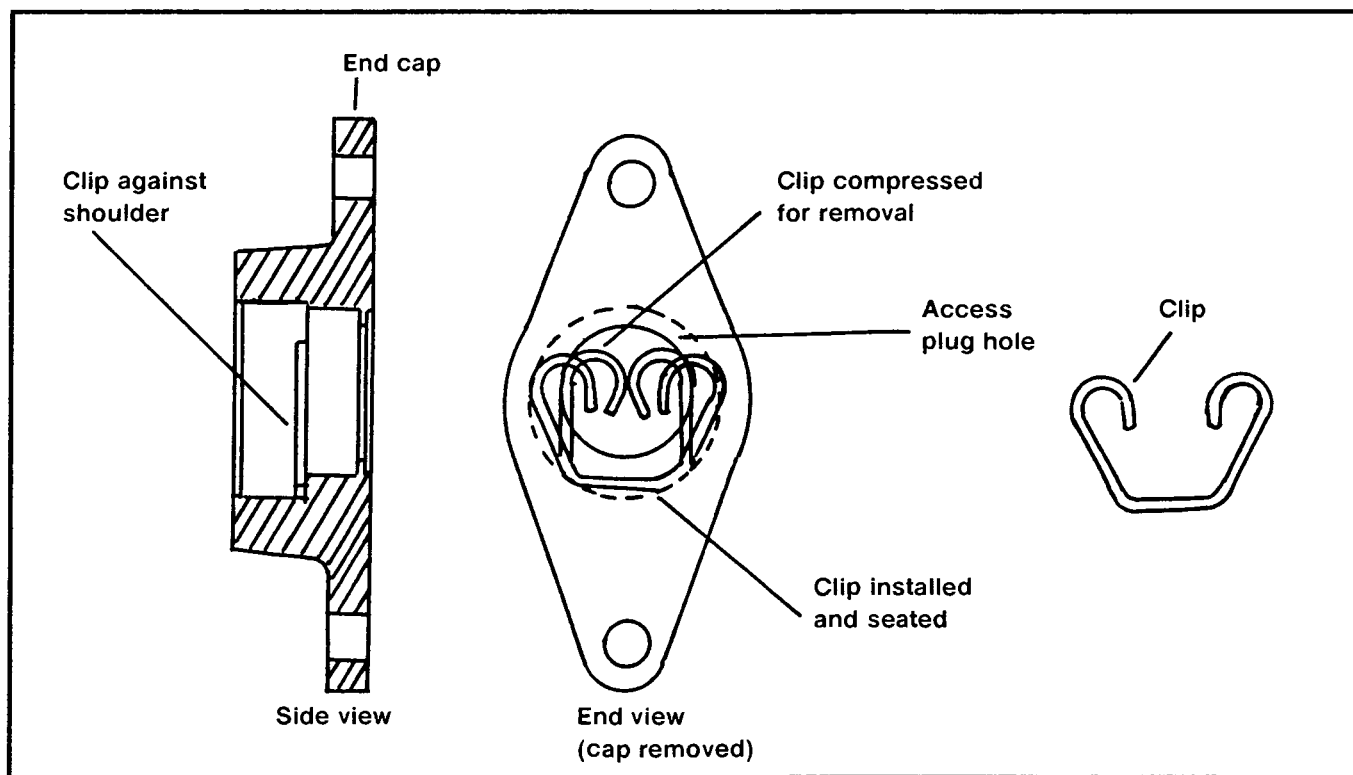


Figure 1. Retaining Clip Installation

ROUTING:	SERVICE MANAGER	SALES MANAGER	PARTS MANAGER	CHIEF MECHANIC	MECHANIC NO. 1	MECHANIC NO. 2	MECHANIC NO. 3	MECHANIC NO. 4	RETURN THIS TO:
INITIAL HERE									