

Table of Contents

REF: Tools - 142	1
Swingarm Tools	1
Pivot Bolt	1
<i>Swingarm Thread Repair Tool</i>	2

[Go To Technical Menu](#)

REF: Tools - 142

Swingarm Tools

Pivot Bolt

93-03 swingarm pivot bolt wrench sizes.

To remove the pivot bolt, remove the pivot bolt screw and turn the bolt a few turns to loosen it up. Put the pivot bolt screw back in a few turns and whack it with a hammer to initially drive it toward the right side.

Then use a screwdriver to pry the bolt out while turning the screw. Continue turning while giving up pressure on the wrench to back the bolt out.

93-03 (2925A) pivot bolt screw (3/8" Allen head)



1)

93-03 (41568-81B) swingarm pivot bolt (1" head head)



2)



3)




4)

Swingarm Thread Repair Tool

A wrecked right side bearing locknut 47515-52 [52 to E74] with a fitting welded into it. Slots were cut into the threads and it is used to chase / repair the threads in the swingarm. ⁵⁾



Swingarm thread repair tool ⁶⁾

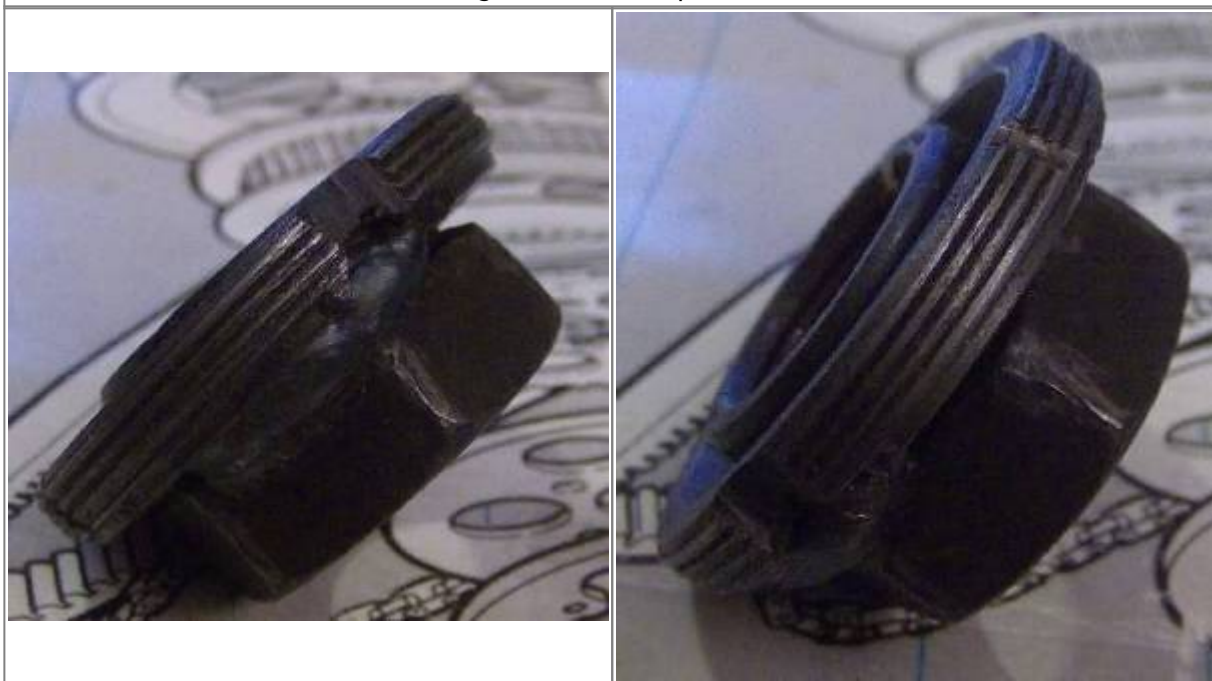

Swingarm thread repair tool ⁷⁾

[Go To Technical Menu](#)

1) 2) 3) 4)

photo by Hippysmack

⁵⁾
IronMick of the XLFORUM <http://xlforum.net/forums/showthread.php?t=1532528>

6) 7)
,

photos by IronMick of the XLFORUM <http://xlforum.net/forums/showthread.php?t=1532528>

From:

<http://www.sportsterpedia.com/> - **Sportsterpedia**

Permanent link:

<http://www.sportsterpedia.com/doku.php/techtalk:ref:tools142>

Last update: **2019/12/02 17:13**

