

**GENUINE MOTOR PARTS AND
MOTOR ACCESSORIES BULLETIN**

P&A NO. 1021

DATE: 5/14/14

**4-Point Docking Hardware Kit – Rushmore Models****Purpose**

This bulletin is to communicate changes to the design and the availability of a new 4-Point Docking Hardware Kit for '14-later Touring model (Part# 52300353). This kit supersedes the previous kit (Part #52300131).

Action Required

Item available for immediate shipment and supersedes previous version.

52300353 – 4-Point Docking Kit

Complete kit contains the docking hardware necessary to allow installation of Detachable Sissy Bar, Solo Luggage Rack, 2-Up Luggage Rack, Solo Tour-Pak Rack or 2-Up Tour-Pak Rack.

This new kit offers the ability to flip the docking point to increase or decrease the point spacing for optimal fit. In addition, the docking points are elliptical in shape allowing users to rotate the position ensuring the tightest fit. Installation and adjustment instructions are outlined in the included instruction sheet –J05999. (Figure 1. included as reference in this document)

By offering this new docking kit we are able to expand fitment to the following:

- Three-Pocket Fairing Pouch used with Detachable Two-Up Rack(s)
 - '14-later FLHX, FLHXS, FLHTK, FLHTCU models
- 16" Fat Ape Handlebar Kit w/Risers (part# 56942-10B & 55857-10B) used with Detachable Two-Up Rack(s)
 - '14-later FLHR, FLHRC models

Existing inventory (Part# 52300131) should be used on vehicles that do not contain Detachable Two-Up Luggage Rack in conjunction with Three-Pocket Pouch or P & A Handlebars.





GENUINE MOTOR PARTS AND MOTOR ACCESSORIES BULLETIN

P&A NO.

DATE:




NOTES

See Figure 1.

- Install the docking points (1) to the docking plates (5) with the thicker flange (2) facing inward.
- The black plastic docking point insert is elliptical, with two notches 180 degrees apart indicating the largest diameter. With notches horizontal (3), docking point fit is loosest. With notches vertical (4), docking point fit is tightest.

is05506d

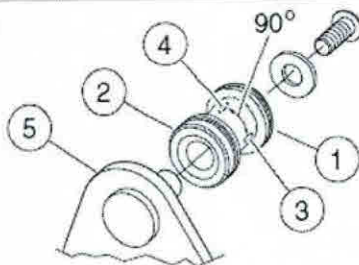

1. Docking point
2. Thicker flange
3. Notch (2), 180 degrees apart horizontally
4. Docking point rotated 90 degrees, notches vertical
5. Mounting plate

Questions

Please contact Technical Service with any concerns regarding application. Please direct all other questions to your Dealer Services Representative.



FILE FOR FUTURE REFERENCE