



INSTRUCTIONS

-J00293

REV. 5-1-93

Kit Number 56467-88A

LUGGAGE RACK

General

This kit is designed for installation on 1982 and later XL and 1982 and Later FXR model vehicles equipped with a sissy bar and side plate kit.

WARNING

Maximum recommended load for luggage rack is 10 lbs.

This kit contains the following parts:

QTY	DESCRIPTION
4	Screw, 1/4-28 x 1-3/8 in. socket head
4	Screw, 1/4-28 x 5/8 in. socket head
8	Locknut, 1/4-28
1	Side plate, left
1	Side plate, right
1	Luggage rack

Installation

1. Remove reflector from sissy bar side plates, if applicable, to gain access to sissy bar mounting screws. Remove excess reflector adhesive.

NOTE

New reflectors, Part Number 59267-83A, must be purchased separately.

2. Remove and discard the screws securing sissy bar to sissy bar side plates.
3. See Figure 1. Position luggage rack support brackets (1) inside of sissy bar assembly. Thread two 1/4-28 x 1-3/8 in. screws (2) through holes in sissy bar side plate, sissy bar and luggage rack support. Retain with 1/4-28 locknuts (3) from kit. Do not tighten.
4. Repeat step 3 for other side.

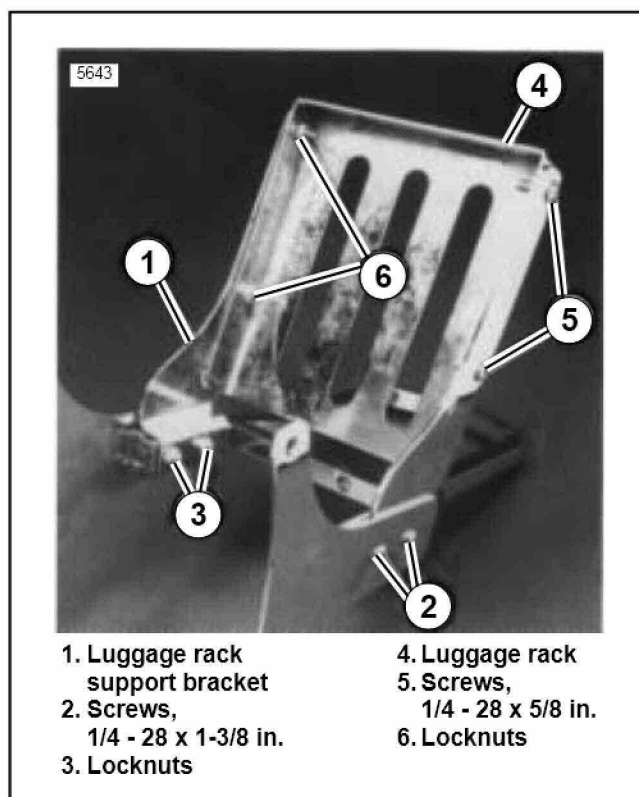


Figure 1. Luggage Rack Installed

5. Place luggage rack (4) between support brackets so support brackets are against outside edge of luggage rack.
6. Secure luggage rack to support brackets with 1/4-28 x 5/8 in. screws (5) and locknuts (6) from kit.
7. Tighten hardware installed in step 3.