



# INSTRUCTIONS

-J01180

REV. 07-31-2002

Kit Number 50212-98

## SPORTSTER JIFFY STAND EXTENSION KIT

### General

This kit fits all 1984 and later XLs **except for the following:**

- Kit **will not fit** 883 Hugger models.
- Kit **will not fit** 1992 through 1999 883C or 1200C models.

See the Service Parts illustration for kit contents.

### Installation

1. Block the motorcycle under the frame so that it is securely upright (not leaning to either side), and so that the jiffy stand may be moved, without restriction, through its normal range of travel.
2. See the Service Parts illustration. Insert the nipple end of the rubber bumper (2) into the hole in the end of the jiffy stand extension (1). Pull on the end of the nipple to properly seat the bumper into the extension. Cut off the "pull end" at the tip of the nipple.
3. Move the jiffy stand to its retracted position. Place the extension onto the upper flat section of the jiffy stand, positioning it 1/2" (13 mm) away from the "bend line" in the flat section of the jiffy stand as shown. Mark the position of the extension mounting hole onto the jiffy stand. Remove the extension and set aside.
4. Move the jiffy stand to its extended position. With the underside of the jiffy stand flat section supported by a wood block(s), use a center punch to indent the jiffy stand at the hole center position marked in Step 3. This will help to prevent the drill bit from wandering off center during the drilling procedure.

Drill a starter hole through the jiffy stand (at the center punch indentation) using a 1/16"-1/8" drill bit at a slow speed. Use of a cutting oil is also recommended. Drill the finish hole with a 1/4" drill bit at a slow speed.

5. Position the extension on the jiffy stand and secure with the hex socket screw (3) and locknut (4) from the kit. Tighten the fasteners to 8 ft-lbs (11 Nm).
6. Check the jiffy stand and extension for unrestricted movement through their normal range of travel.
7. Move the jiffy stand to its extended position. Carefully remove the support blocking from beneath the motorcycle frame.

### WARNING

The jiffy stand extension is intended only to improve the rider's access to the jiffy stand. It is not intended to be used as an indicator of jiffy stand position.

Always check the jiffy stand itself to verify that it is in the full forward (down position) for parking, and the vehicle weight is rested on it. Without vehicle weight resting on the jiffy stand, any movement of the vehicle could cause the jiffy stand to retract slightly from the full forward position. If the jiffy stand is not in the full forward (lock) position when vehicle weight is rested on it, the vehicle may fall over which could result in death or serious injury.

Be sure jiffy stand is fully retracted before riding the motorcycle. If jiffy stand is not fully retracted during vehicle operation, it could contact the road surface causing a momentary disturbance before retracting. This momentary disturbance could distract the rider, which could result in loss of vehicle control and death or serious injury.

### CAUTION

Do not step on the jiffy stand extension or it may be damaged.




## Service Parts

Part No. 50212-98

Date 07/02

Jiffy Stand Extension Kit

i01133a

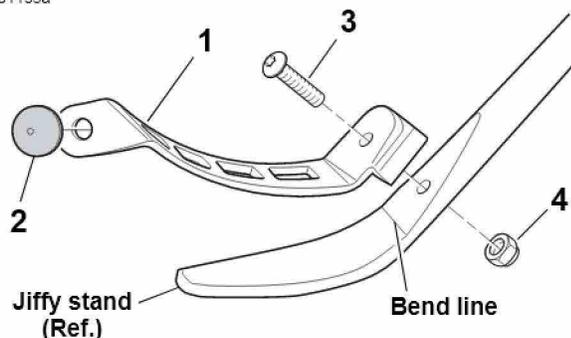

Item	Description	Part No.
1	Extension, Jiffy Stand	Not sold
2	Bumper, Rubber, 0.83" (21 mm) dia.	62123-66
3	Cap Screw, Button Head, Hex Socket, 1/4"-20 x 1"	94388-92T
4	Nut, Hex Lock, 1/4"-20	7671