

3-5-14-14



TT433: STREET MODELS COOLANT AND FUEL CAP INFORMATION



April 3, 2014

SB-10055748-9608

APPLIES TO	SYMPTOMS
2015 Harley-Davidson Street™ Models	<ul style="list-style-type: none"> • Fluid or Oil Leaks • Part Availability, Installation or Fitment Updates

Purpose

The purpose of this Tech Tip is to communicate information regarding coolant found in the bottom of the crate when delivered and instructions for proper fuel cap installation.

Coolant Leakage

Some coolant may be visible in the crate under the motorcycle when delivered. This is a normal condition. During transportation the movement of the motorcycle allows a small amount of coolant to flow down the overflow hose from the overflow tank.

Follow the PDI instructions to check the coolant level.

Fuel Cap

⚠ WARNING

Avoid spills. Slowly remove filler cap. Do not fill above bottom of filler neck insert, leaving air space for fuel expansion. Secure filler cap after refueling. Gasoline is extremely flammable and highly explosive, which could result in death or serious injury. (00028a)

⚠ WARNING

Do not use aftermarket fuel caps. Aftermarket fuel caps may fit improperly and leak, which could lead to death or serious injury. See a Harley-Davidson dealer for approved fuel caps. (00034a)

See Figure 1. To ensure proper fuel cap installation, install fuel cap with the arrow (1) pointing toward the front of the motorcycle.

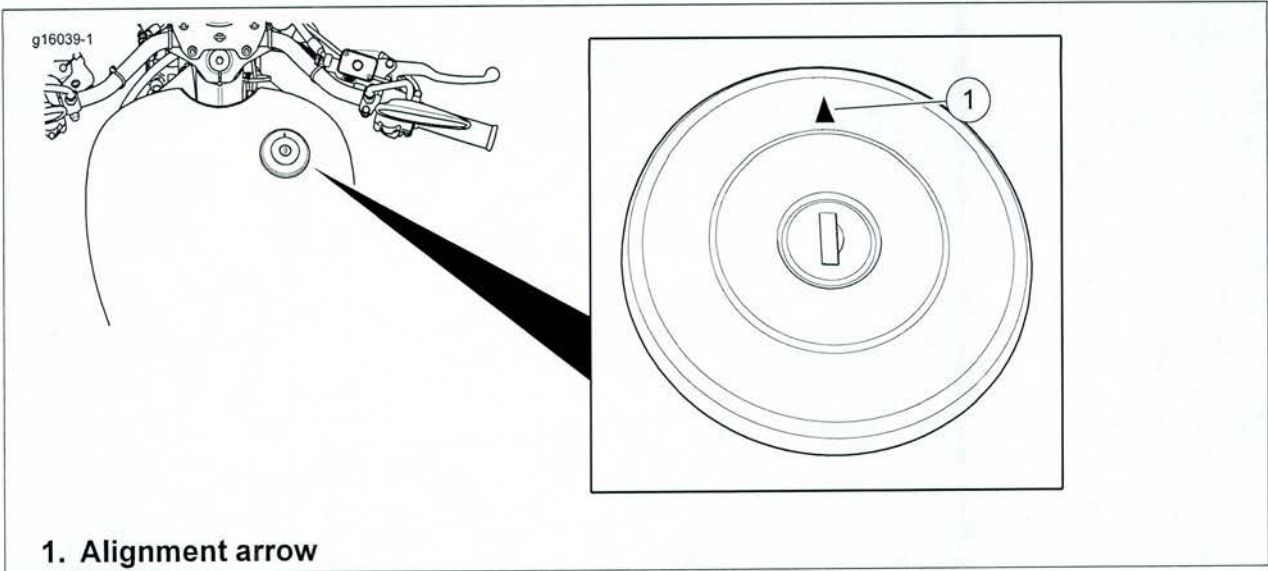


Figure 1. Fuel Filler Cap