



# INSTRUCTIONS

-J01857

REV. 12-10-99

Kit Numbers 94797-00, 94799-00

## BRIEF SAC

### General

94797-00 Fabric Brief Sac.

94799-00 Leather Brief Sac.

These kits fit:

- 1982 and later XL with Low Upright, H-D Backrest Pad, and rack 53711-96 or 56467-88A.
- 1991 and later FXD/FXDL/FXDCON models with low or stock upright, H-D Backrest Pad, and rack 53711-96 or 53547-91.
- 1984 and later FXSTC/S/SB models with stock or low uprights, H-D Backrest Pad, and Bobtail fender rack 56466-86C.
- 1993 and later FXDWG with stock uprights, H-D Backrest Pad, and Bobtail rack 56469-93B.
- 1984 and later Softails with stock or low uprights, H-D Backrest Pad, and rack 53465-87B, 56465-86A or 53713-96.
- 1994 and later FLHR, FLHT with 4-channel luggage rack 53341-97 or 53391-94 or with detachable luggage rack and sissy bar combinations 52805-97 with 53637-96 or 52933-97 with 53743-97 and rectangular backrest pads 52555-94A, 52587-94A or 52883-98

Kit contains 1 brief sac.

### Installation

1. Unzip the top and bottom zipper on the back of brief case. A sissybar cover is attached to the interior of this pocket.
2. Place the brief case over the sissy bar by sliding the sissy bar cover located within the unzipped back pocket over your sissy bar.
3. Run the two straps located within the unzipped pocket around the sissy bar support and clip back into the female clips located to each side of the sissy bar cover.
4. Pull the straps tight and the brief case is secured to the motorcycle.

The sissy bar cover is located inside the lower zippered pocket of the brief sac. Slip the sissy bar cover over the sissy bar. A similar sissy bar cover is shown for illustration purposes.

i01240

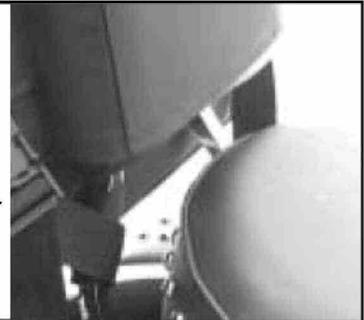


Figure 1. Similar sissy bar cover

i01964



Figure 2. Place Brief Sac over Sissy bar (straps will hang down)



Figure 2. Fasten straps around sissy bar and into the female clips located on the side of the sissy bar cover